



Hydraulic overrun brake



Spare tire with holder




The refined suspension system ensures that the trailer is towed safely and securely.



Support wheel with reinforced construction



Modified folding ramp provides underride protection

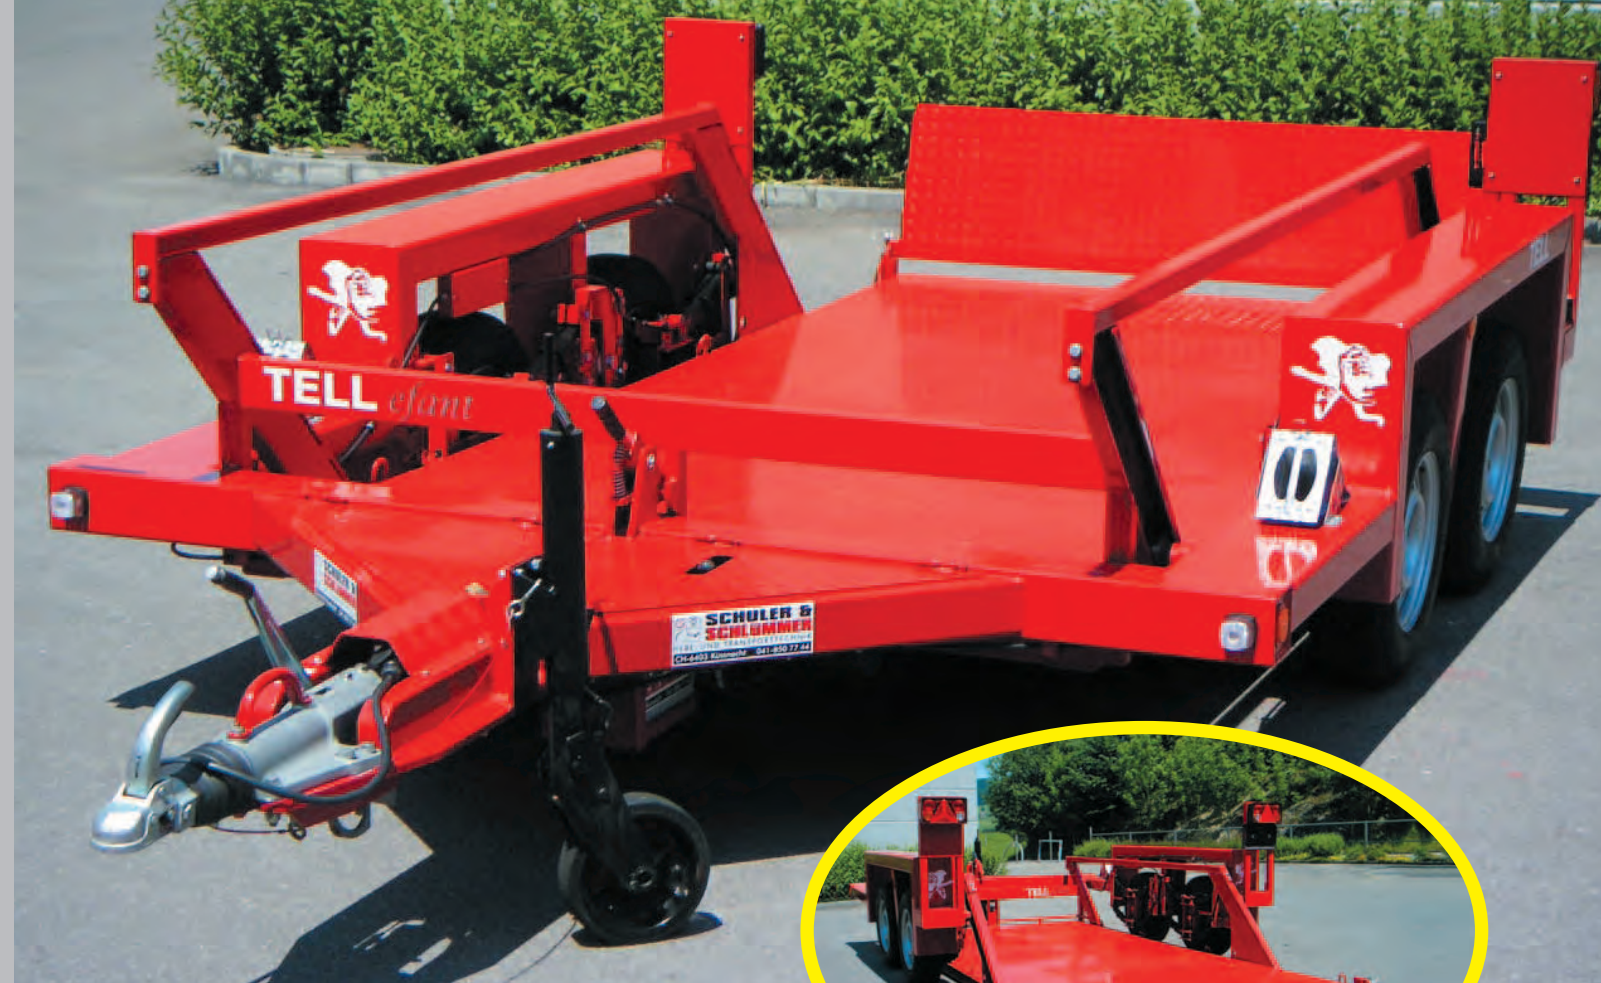

Made in Switzerland

TELL *efant*

DER ALLROUNDER

TELL *efant*

DER ALLROUNDER



Made in Switzerland by

SCHULER & SCHULER AG
HEBE- UND TRANSPORTTECHNIK
CH-6405 Immensee (SZ) contact@schuler-schuler.ch
Telefon +41 41 854 7000 Telefax +41 41 854 7001
www.schuler-schuler.ch



SMILE



LOAD



LIFT

- ✓ Save time and avoid potential accidents!
- ✓ Spare your back and save your energy wisely!
- ✓ Eliminate hassles associated with undersized, steep, and slippery ramps!



Chassis-integrated, lockable storage compartments.



Battery and hydraulic components are integrated with the chassis and are lockable.



The lift cylinder is protected under the drawbar, and makes direct contact with the platform.



The entire width of the platform serves as the ramp; the flat pitch also makes it possible to drive equipment with minimal ground clearance directly onto the trailer.

See for yourself, how the **TELL^{efant}** has made a distinguished name for itself.

The design of this patented, innovative trailer is the result of sophisticated engineering and comprehensive testing.

With years of experience building **TELL^{efant}** trailers, we guarantee offers the highest quality and top performance when it comes to safety and handling.

Give us a call!

Technical Specifications

Series	TÜV	TL35 (Models have TÜV approval)	TÜV	TL60
Model		150-275	180-375	180-375
Carrying capacity (approx.)		2200 kg	2050 kg	4300 kg
Total weight		3500 kg	3500 kg	6000 kg
Inside loading dimensions in mm		1500x2750	1800x3750	1800x3750
Outside dimensions (W x L) mm		2200x4800	2500x5800	2500x5800
Lifting device		electric/hydraulic	electric/hydraulic	electric/hydraulic
Axles		2	2	2
Suspension		Leaf spring	Leaf spring	Leaf spring
Brakes		Overrun brakes	Overrun brakes	ABS / ALB: Air brake

Prices and models subject to change.

- Solid Chassis:** 10x25 cm Steel-tube chassis frame, entire length of platform reinforced with diamond-plate steel.
- No Tipping:** The trailer can be loaded in a free standing position, or when attached to vehicle; the platform always stays in a level position.
- Large Platform:** A 1.80 m wide platform enables the loading of: wide machines, 2 scissor-lifts, up to six pallets, cleaning equipment, rolls, light excavation equipment, etc.
- Loading Ramp:** The platform's flat pitch also enables the loading of equipment with minimal ground clearance. Level entry along the entire width of the platform makes loading safe and easy – especially in the winter.
- Suspension:** We use the best suspension available for a trailer in order to provide the safest, most comfortable ride, for all applications.
- Platform Bearings:** Oversized, self-lubricating bearings guarantee durable, wear-free performance.
- Hydraulic Cylinder:** A high quality sealed cylinder is mounted under the drawbar and makes direct contact with the platform.
- Automatic Platform Safety:** The Platform is automatically coupled in a fixed position to ensure safe transportation.
- Lockable Storage Compartments:** The battery and hydraulic components, as well as the toolbox, are lockable.

